




RIGID CORE / WATER PROOF PLANK

A "best in the industry" RIGID CORE water proof durable plank that is easily installed in your water prone areas. It is the best in the industry for Rigid Core and WPC products with surface density to help prevent denting in most applications. It is a warm, durable, soft under your foot, impact and scratch resistant, water proof floor.

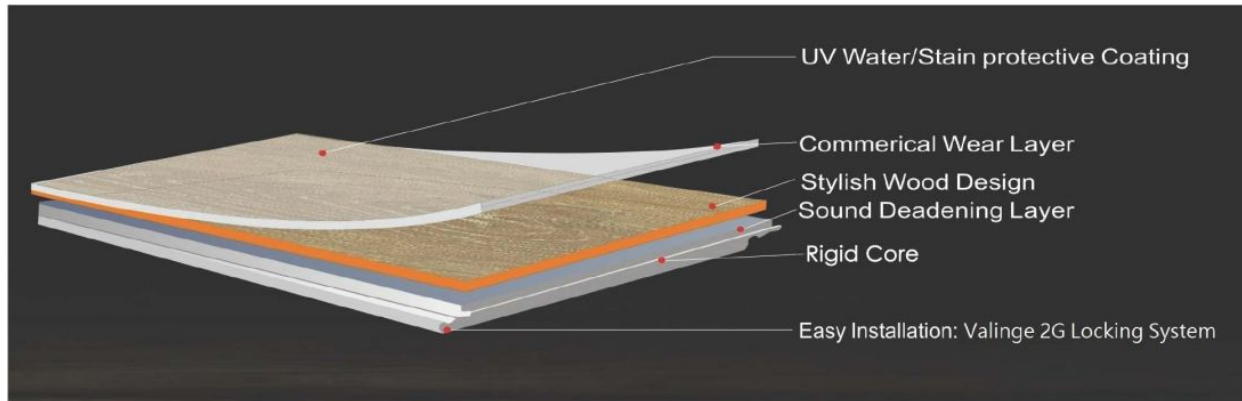

WARRANTIES

Residential:	Lifetime Limited Wear Warranty Lifetime Limited Structural Integrity Warranty Lifetime Limited Waterproof Warranty
Commercial:	15 Year Limited Wear Warranty

INSTALLATION

Grade Level:	Above Grade On Grade Below Grade
Method:	Floating
Radiant Heated Floor:	Yes. Can be installed over radiant floor heating system

SPECIFICATIONS

Construction:	UV Protective Coating 20 mils Virgin <u>PVC</u> with Aluminum Oxide Wear Layer Décor Layer 4.0 mm Rigid Water Proof Core 1.0 mm Scuba Underlayment		
Dimensions:	Thickness	5mm with PAD	nominal
	Width	7 1/8 in.	nominal
	Length	48 in.	nominal
Joint Locking:	Valinge 2G Locking System		



Casabella®
Vinyl

ScubaSeal DATA SHEET

Date: 2-19-2018

Surface Edging: Micro beveled; all sides
Surface Texture: Hand-scraped; Embossed; Distressed.

PACKAGING

Planks per carton: 7
Sq. Ft. per carton: 17 nominal
Cartons per pallet: 70

PERFORMANCE

Sound Transmission Class:	STC 60	ASTM E413 -10, ASTM E90-09,
	IIC 61	ASTM E492-09, ASTM E989-06
Slip Resistance	CLASS DS	EN 13893
Curling from Heat	Pass	EN 434
Abrasion Resistance:	AC4	EN 13329
Light Stability:	6 or Above	ISO 105-B02
Formaldehyde Emission	E1	EN 717-1
Residual Indentation	Pass	EN 433
PSI	3000 PSI / No Pad	ASTM D6111-13a
	1000 PSI / Scuba Pad	ASTM D6111-13a
Castor Chair Resistance		EN 425
Critical Heat Flux	Pass	EN ISO 9239-1
	Class B	

COMPLIANCE

CA Section 01350	Compliant
CARB II	Compliant
CA Proposition 65	Compliant